


REVISIONS			
REV	NUMBER	DESCRIPTION	DATE
A		DESIGN	

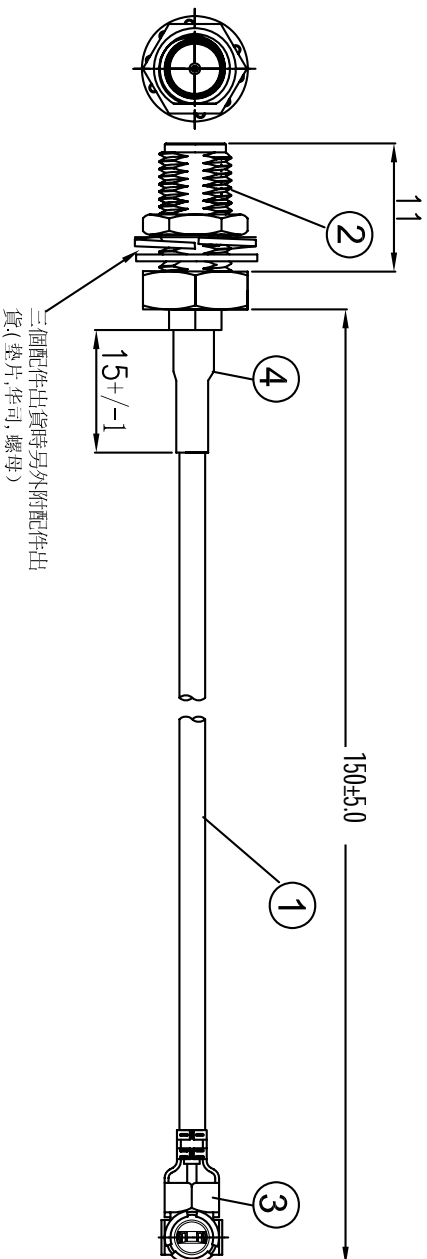

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX, 1代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	Rg178棕色线, OD:1.80mm	AS

深圳市金航标电子有限公司 WWW.BDS666.COM

KHB(RG178)-150-28 0755-83044319

ALL DIMENSION ARE IN MM		DRAWN James	DATE 2019-06-01
COMPUTER GENERATED IN SOLIDWORKS		CHKD. Frank	2019-06-01
DO NOT SCALE THIS DRAWING		APPD. Scott	2019-06-01
PROJECTION		GENERAL TOLERANCE FOR ANGLES X.X XXX XXXX ± 1° ± 0.3 ± 0.25 ± 0.150	
CUSTOMER P/N:		SIZE Number	REV A
		SCALE: Free	TYPE SHEET 1 OF 1

I-PEX 178 TO SMA /F L=150MM