


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |

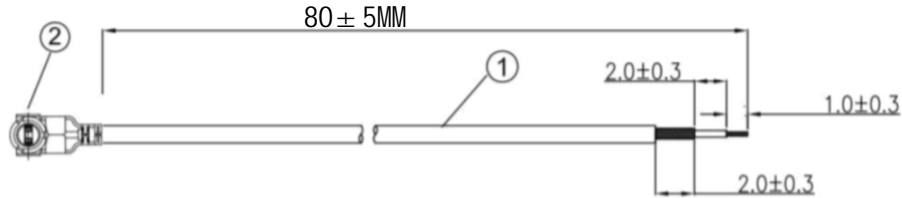

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|--------------------|------|
| | | | AS |
| ② | 接头 | 4代 IPEX端子 | 1 |
| ① | 同轴线 | RF1.37黑线,OD:1.37mm | AS |

深圳市金航标电子有限公司

www.kinghelm.com.cn

KHA-(RG1.37)-TX80-IPEX4-221

0755-28190160

ALL DIMENSION
ARE IN MM

DRAWN Jamy DATE 2020-06-15

ENG.

COMPUTER GENERATED
IN SOLIDWORKS

MFG.

DO NOT SCALE
THIS DRAWING

Q.A.



GENERAL TOLERANCE FOR
ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150

SIZE Number

B

REV

A

CUSTOMER PIN:

SCALE: Free

TYPE

SHEET 1 OF 1