


# Kinghelm®

| REVISIONS |        |             |     |     |      |
|-----------|--------|-------------|-----|-----|------|
| REV       | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A         |        | DESIGN      |     |     |      |

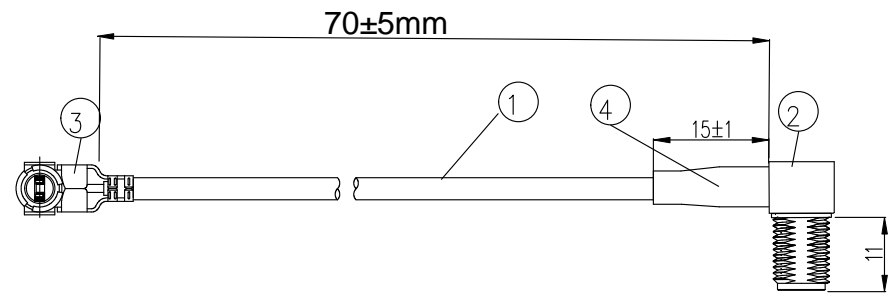

- NOTES:
- ELECTRICAL:
    - VOLTAGE RATING:DCV 100V 10MS
    - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
    - INSULATION RESISTANCE: 20M OHM/MIN.
    - THE CABLE SHOULD BE 100% ELECTRICAL TEST
    - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
  - MATERIAL:
    - SEE TABLE
  - ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION           | QTY. |
|----------|-------------|-----------------------|------|
| ④        | 套管          | 黑色热缩套管, 2*15MM        | AS   |
| ③        | 接头          | 三代IPEX0.81国产端子        | 1    |
| ②        | 接头          | SMA母头母针 弯头, 11牙, 镀金   | 1    |
| ①        | 同轴线         | RF0.81黑色线, OD: 0.81mm | AS   |

深圳市金航标电子有限公司 [www.kinghelm.com.cn](http://www.kinghelm.com.cn)  
 型号: KH-SMAKW-IPEX3-RG0.81-B70 0755-83044319

|                                  |   |                      |                               |
|----------------------------------|---|----------------------|-------------------------------|
| ALL DIMENSION ARE IN MM          | DRAWN<br>Jamy   | DATE<br>2019 /03 /01 | <b>I-PEX to SMA/F L=70MM</b>  |
|                                  | ENG.  |                      |                               |
| COMPUTER GENERATED IN SOLIDWORKS | MFG.  |                      |                               |
| DO NOT SCALE THIS DRAWING        | Q.A.  |                      |                               |
| PROJECTION<br>                   | GENERAL TOLERANCE FOR ANGLES<br>X.X X.XX X.XXX<br>± 1' ± 0.3 ± 0.25 ± 0.150 |                      | SIZE<br>B                     |
| CUSTOMER P/N:                    |   |                      | REV<br>A                      |
|                                  |   |                      | SCALE: Free TYPE SHEET 1 OF 1 |