


| REVISIONS |        |             |     |     |      |
|-----------|--------|-------------|-----|-----|------|
| REV       | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A         |        | DESIGN      |     |     |      |

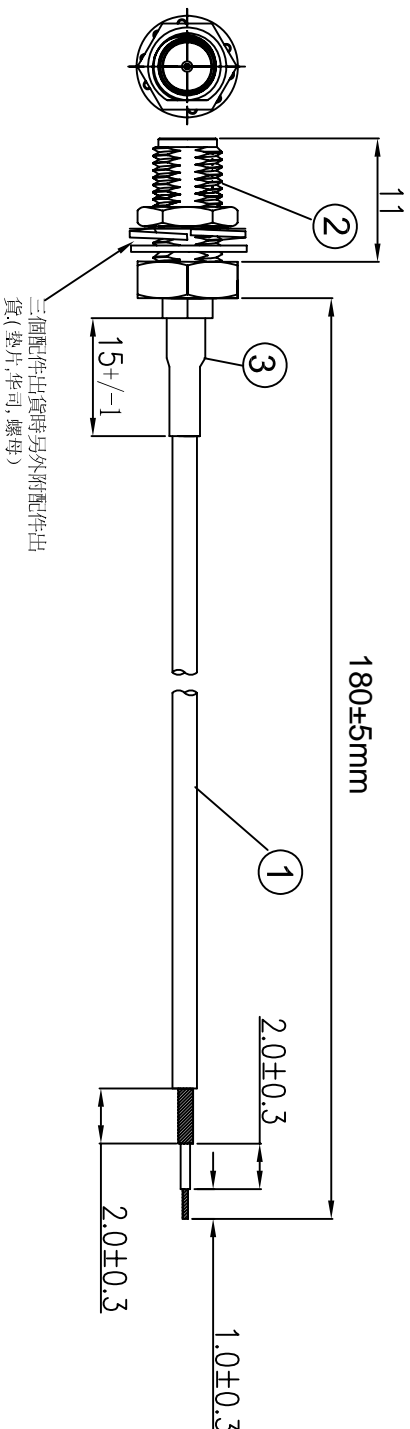

NOTES:

- ELECTRICAL:
  - VOLTAGE RATING:DCV 300V 10MS
  - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - INSULATION RESISTANCE: 5.0M OHM/MIN.
  - THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
  - SEE TABLE
  - ALL COMPONENTS ARE ROHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION          | QTY. |
|----------|-------------|----------------------|------|
| ①        | 同轴线         | RF 178棕色线, OD:1.8 mm | AS   |
| ②        | 接头          | SMA母头母针, 分体, 11牙, 镀金 | 1    |
| ③        | 套管          | 黑色热缩套管, OD:2.0MM     | AS   |

深圳市金航标电子有限公司

WWW.BDS666.COM

型号: KH-122-178SMA-180

0755-83044319

| ALL DIMENSION ARE IN MM   |  | DRAWN | DATE       | SMA /F TO OPEN L=180mm |  |
|---|--|-------|------------|------------------------|--|
| COMPUTER GENERATED IN SOLIDWORKS                                      |  | Janny | 2020-06-15 |                        |  |
| DO NOT SCALE THIS DRAWING   |  | ENG.  |            |                        |  |
| PROJECTION  |  | MFG.  |            |                        |  |
| GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150 |  | Q.A.  |            |                        |  |

CUSTOMER P/N:

| SIZE | Number | REV |
|------|--------|-----|
| B    |        | A   |

SCALE: Free TYPE SHEET 1 OF 1