


# Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

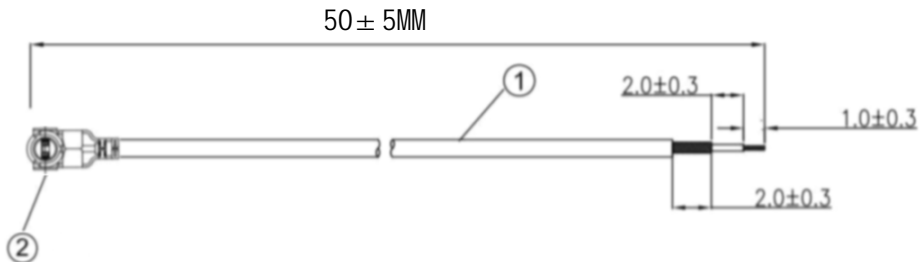

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
②	接头	四代IPEX端子	1
①	同轴线	RG0.81白色线, OD: 0.81mm	AS

深圳市金航标电子有限公司      www.kinghelm.com.cn

KH-IPEX4-221-RG0.81-WH50      0755-28190160

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2020-06-15	四代IPEX TO OPEN RG0.81白色转接线
COMPUTER GENERATED IN SOLIDWORKS	ENG.		
DO NOT SCALE THIS DRAWING	MFG.		
PROJECTION	Q.A.		
CUSTOMER PIN:	GENERAL TOLERANCE FOR ANGLES X.X    X.XX    X.XXX ± 1°    ± 0.3    ± 0.25    ± 0.150		SIZE Number <b>B</b>
			REV <b>A</b>
			SCALE: Free    TYPE    SHEET 1 OF 1