


Kinghelm®

| REV | | REVISIONS | | |
|--------|-------------|-----------|-----|------|
| NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | DESIGN | | | |

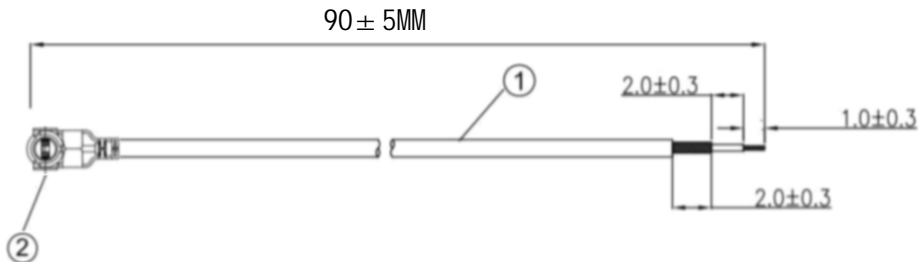

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-----------------------|------|
| ② | 接头 | 一代IPEX端子 | 1 |
| ① | 同轴线 | RG1.13白色线, OD: 1.13mm | AS |

深圳市金航标电子有限公司 www.kinghelm.com.cn

KH-IPEX-221-RG1.13-WH90 0755-28190160

| | | | |
|----------------------------------|--|----------------------|-------------------------------------|
| ALL DIMENSION ARE IN MM | DRAWN Jamy | DATE 2020-06-15 | 一代IPEX TO OPEN RG1.13白色转接线 |
| COMPUTER GENERATED IN SOLIDWORKS | ENG. | | |
| DO NOT SCALE THIS DRAWING | MFG. | | |
| PROJECTION | Q.A. | | |
| CUSTOMER PIN: | GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150 | | SIZE Number B |
| | | REVISION A | SCALE: Free TYPE SHEET 1 OF 1 |